


SHUR-FLEX® DRIVEABLE

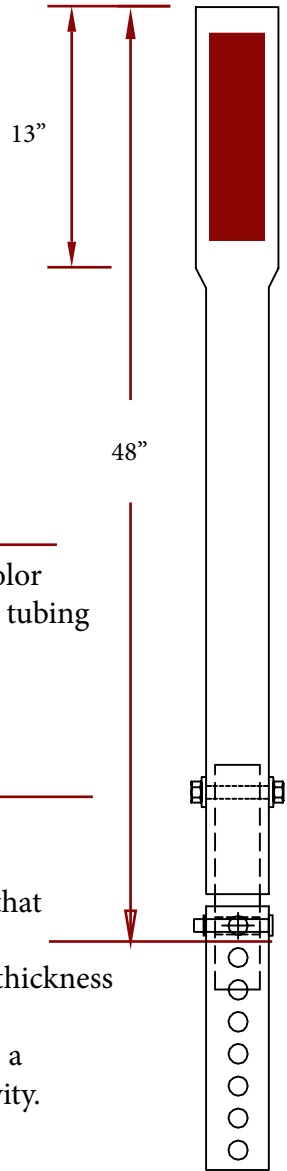

FEATURES


- Utilizes the patented Shur-Flex® system
- Non-mechanical flexible design is self-righting upon impact
- Multiple reflectivity options
- Premium UV added for long lasting color
- Anchor is 2" x 12ga. square perforated tubing
- Quick and simple installation
- NTPEP tested, MUTCD compliant

SPECIFICATIONS

Shur-Flex® System - 3 Component Design

- The flexible square to round joint is a simple one piece, non-metallic molded design that withstands multiple impacts assuring long-life in corrosive environments.
- Posts are manufactured with no less than 70% recycled materials with a heavier wall thickness to provide structural integrity.
- Top of posts can be permanently sealed and partially flattened to accommodate up to a 3" x 12" piece of reflective sheeting or a round top to provide 360° degrees of reflectivity.
- Perforated steel tubing anchors are used to accommodate multiple soil conditions.
- One pin - one minute! We've made it quick and easy to install or replace a post.
- All post colors or styles are interchangeable with any product utilizing the Shur-Flex® system, making the Shur-Flex® system the most versatile on the market today.

AVAILABLE COLORS

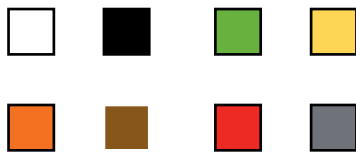

TECHNICAL INFORMATION

Post Diameter: 2.375" OD
Post Heights: 18" up to 72"
Materials: HDPE plastic



Office: 512.218.9500



Email: sales@shur-tite.com



www.shur-tite.com



Shur-Tite Products
PO Box 2283
Round Rock, TX 78680

