



1920 North Weaver
Gainesville, TX 76240




512-218-9500



sales@shur-tite.com
www.shur-tite.com

SHUR-FLEX® SURFACE MOUNT

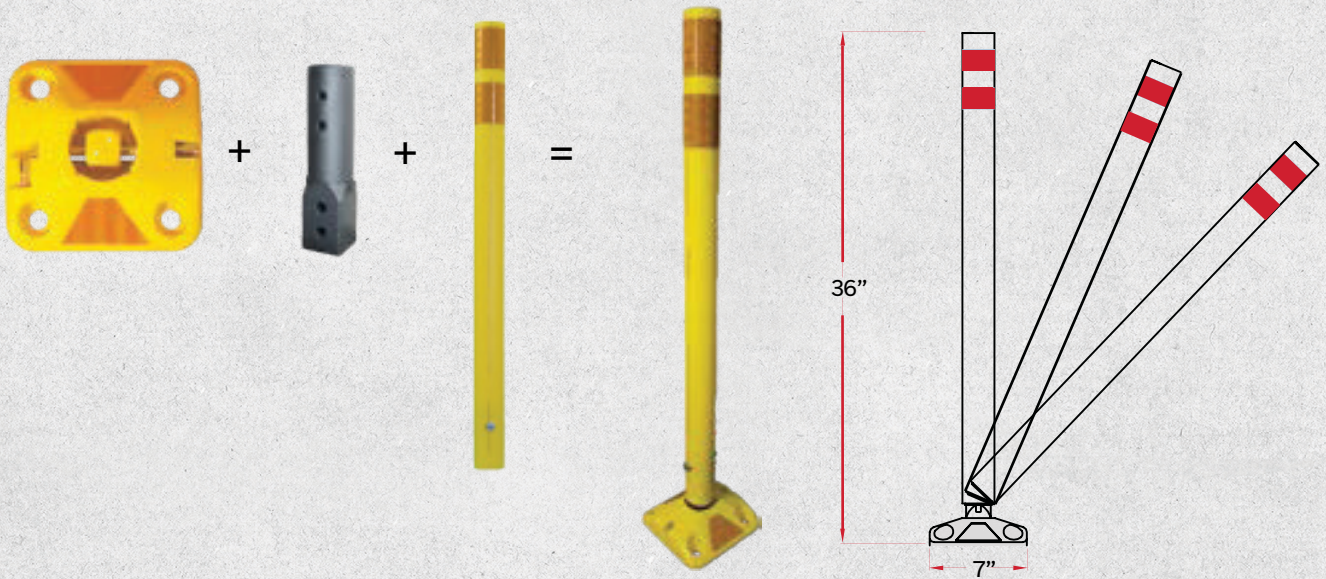

FEATURES

- Utilizes the patented Shur-Flex® system
- Non-mechanical flexible design is self-righting upon impact
- Multiple reflective options
- Multiple base options
- Premium UV added for long lasting color
- Base can be bolted or epoxied
- NTPEP tested, MUTCD compliant

SPECIFICATIONS

Shur-Flex® System - 3 Component Design

- The flexible square to round joint is a simple one piece, non metallic molded design that withstands multiple impacts assuring long-life in corrosive environments.
- Posts are manufactured with greater wall thickness to provide structural integrity.
- Standard posts are round top providing 360° degrees of reflectivity but can be permanently sealed and partially flattened to accommodate up to a 3" x 12" piece of reflective sheeting.
- All post colors or styles are interchangeable with any product utilizing the Shur-Flex® system. Making the Shur-Flex® system the most versatile on the market today.
- Multiple base options. 7"x 7", 7"x 10", and slope base.

Measurements and Specs

Post Diameter: 2.25" OD

Post Heights: 18" up to 48"

Materials: High Density Thermoplastic

Available Post Colors



Available Base Colors

