



1920 North Weaver
Gainesville, TX 76240




512-218-9500



sales@shur-tite.com
www.shur-tite.com

RE-FLEX® SURFACE MOUNT

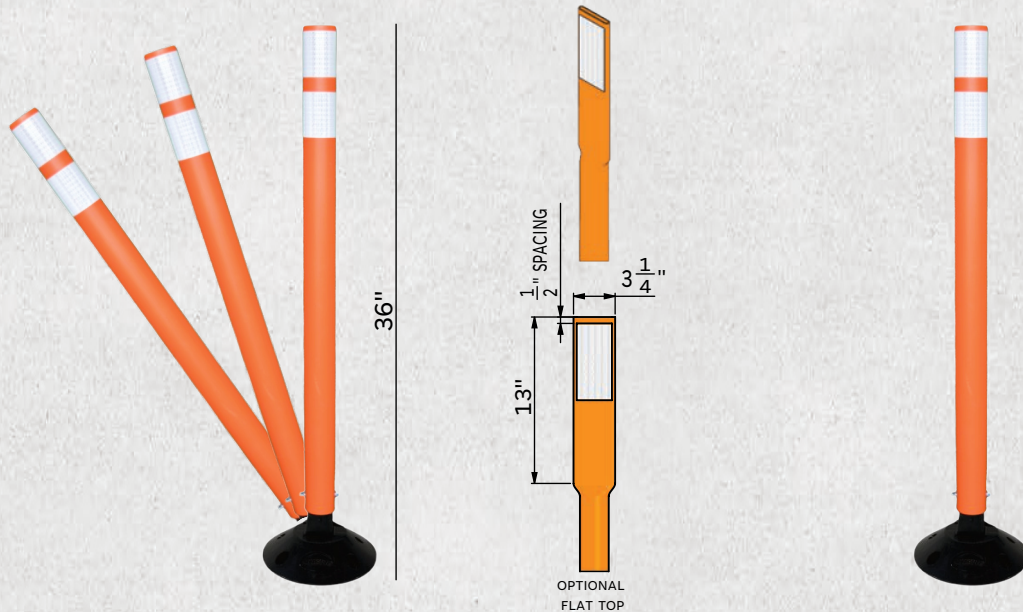

FEATURES

- Utilizes the patented Shur-Flex system
- Non Mechanical design
- Self-righting upon impact
- Multiple reflectivity options
- Multiple base options
- Premium UV added for long lasting color
- Base can be bolted or epoxied
- MASH Certified, MUTCD compliant

SPECIFICATIONS

- The flexible square to round joint is a simple one piece, non-metallic molded design that withstands multiple impacts assuring long-life in corrosive environments.
- Posts are general purpose posts designed to meet MUTCD Standards.
- Standard posts are round top providing 360° of reflectivity but can be permanently sealed and partially flattened to accommodate up to a 3" X 12" piece of reflective sheeting.
- Standard base options are 7" x 7" fixed base, Shur-Curb base and Square Tubing Anchor.

Measurements and Specs

Post Diameter: 2.25" OD
Post Heights: 18" up to 48"
Materials: High Density Thermoplastic

Standard Post Colors

- White
- Yellow
- Orange

Standard Base Color

- Black