



1920 North Weaver
Gainesville, TX 76240




512-966-9198



sales@shur-tite.com
www.shur-tite.com

SHUR-FLEX® SURFACE MOUNT TYPE III MARKERS

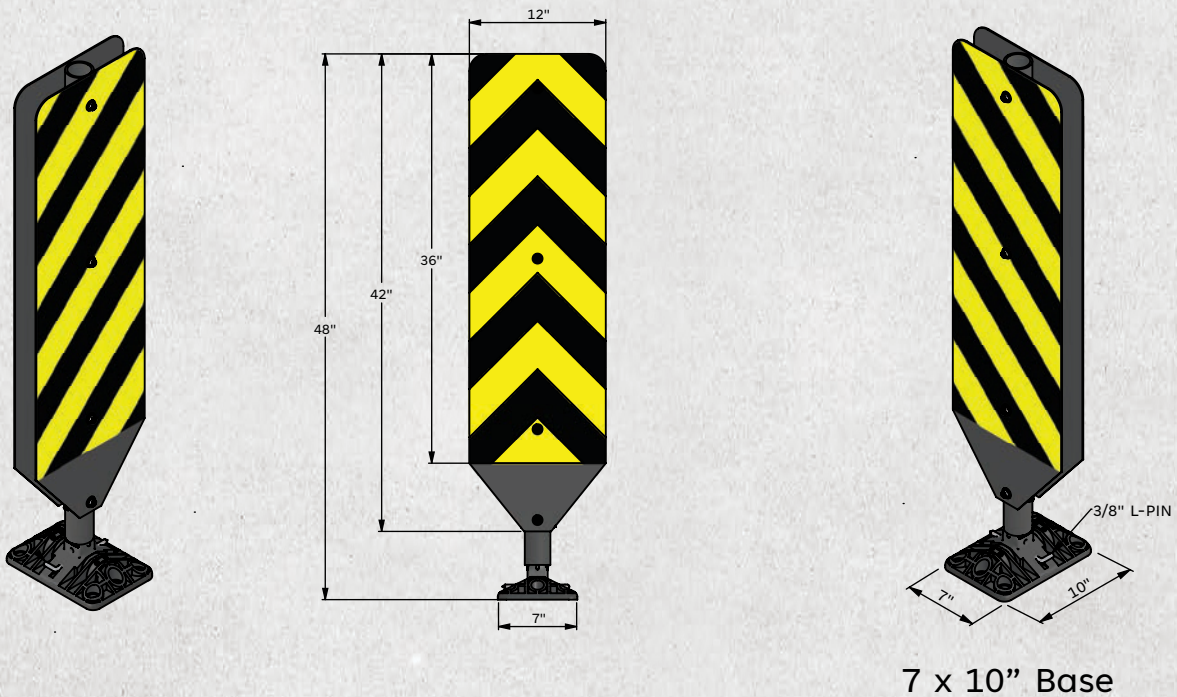

FEATURES

- Utilizes the patented Shur-Flex® system
- Non-mechanical flexible design is self-righting upon impact.
- Each component independently replaceable
- V-bottom for less snags and damage from impacts.
- Multiple base options
- Base can be bolted or epoxied
- DOT tested, MUTCD compliant

SPECIFICATIONS

Shur-Flex® System - 3 Component Design

- The flexible square to round joint is a simple one piece, non-metallic molded design that withstands multiple impacts assuring long-life in corrosive environments.
- Post are manufactured with a greater wall thickness to provide structural integrity.
- Panels can be single or double sided per requirements.
- Standard stock panels are available in 8" X 24", 10" X 24" and 12" X 36"
- One pin - one minute! We've made it quick and easy to install or replace any component.

Measurements and Specs

Post Diameter: 2.25" OD

Post Heights: 36" or 48"

Materials: High Density Thermoplastic

Available Sheeting



OM3-L



OM3-C



OM3-R

Available Base Colors



White



Yellow



Black



Green



Orange