



1920 N Weaver St
Gainesville, TX 76240






512-218-9500



sales@shur-tite.com
www.shur-tite.com

U-FLEX® DRIVEABLE

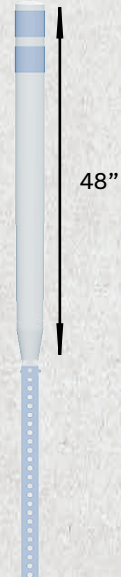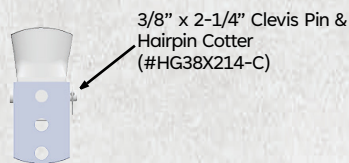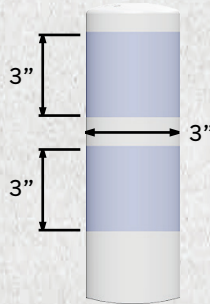

FEATURES

- Patented U-Flex® square-to-round round design for superior flexibility & rebound
- Withstands repeated high-speed impacts without permanent deformation
- 360° visibility for enhanced road safety
- Premium UV inhibitors for long-lasting color & visibility
- Corrosion-resistant materials ideal for harsh environments
- Quick & simple installation reduces labor time
- Fully customizable sheeting options for day & night visibility
- NTPEP tested & MASH certified

SPECIFICATIONS

- One-piece molded urethane construction with patented square-to-round profile
- Designed for repeated impact resistance & long service life
- Non-corrosive material suitable for demanding outdoor environments
- Seal cap design with weep holes to prevent water accumulation
- High-strength urethane formulation for optimale flexibility & rebound
- Uses 2" square perforated steel tube anchors for varied soil applications
- UV-stabilized materials for enhanced color longevity

Measurements and Specs

- **Post Diameter:** 3" OD
- **Post Heights:** 18" up to 48"
- **Materials:** Urethane
- **Anchor:** 2" x 12-gauge perforated steel tubing

Standard Post Colors

- White
- Yellow
- Black
- Green

Standard Sheeting Colors

- White
- Yellow